


Electronic Media II


April 12, 2006

Max/MSP Buffer Record and Groove Play

1. Prepare for live microphone input as follows:
 - a. Plug an xlr cable into an SM57 mic.
 - b. Plug the xlr cable into a xlr 1/8" mini adaptor.
 - c. Plug the 1/8" mini adaptor into the mic input in the back of the G5.
 - d. There is a more complicated option: ask Paul and Rachel.
2. Launch Max and select **Options>DSP Status**. Window like the one below will appear. Set the options to those shown below.

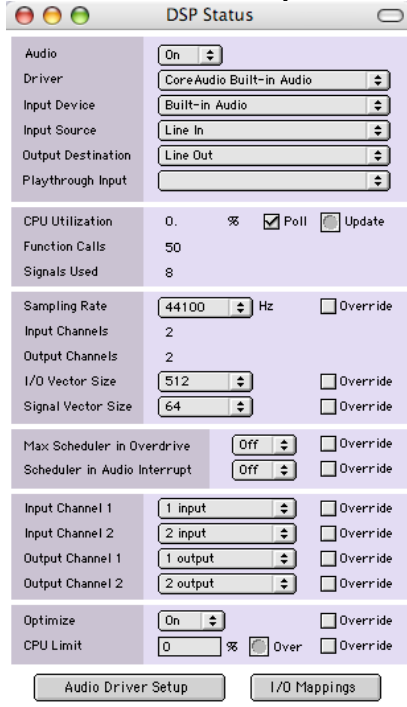

3. Select **Extras>Meterin**. A window like the one below will appear. Talk in the the SM57 and the following will be displayed.

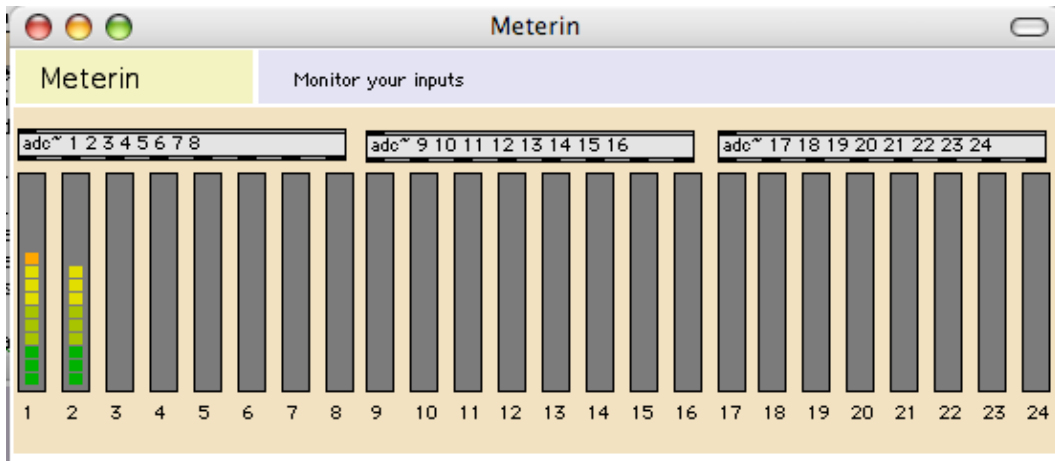

4. Build the patch shown below.

