


## Composition: Electronic Media II

March 5, 2008

### The prepend object in Max/MSP

1. Consider the patches below.

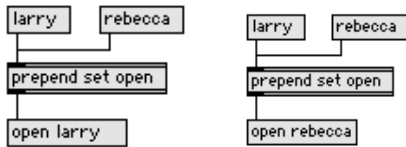

- The patch on the left shows that when the message box “larry” is triggered, this is sent to the **prepend** object “prepend set open”.
- This object modifies in the incoming message by adding the word “open” to the beginning of the message.
- The result is “open larry” when “larry” is triggered, as shown on the left or “open rebecca” when “rebecca” is triggered, as shown on the right.
- Other options will be discussed in class.

2. The patch below will be analyzed in class.

