


Casio CZ-1 Operations

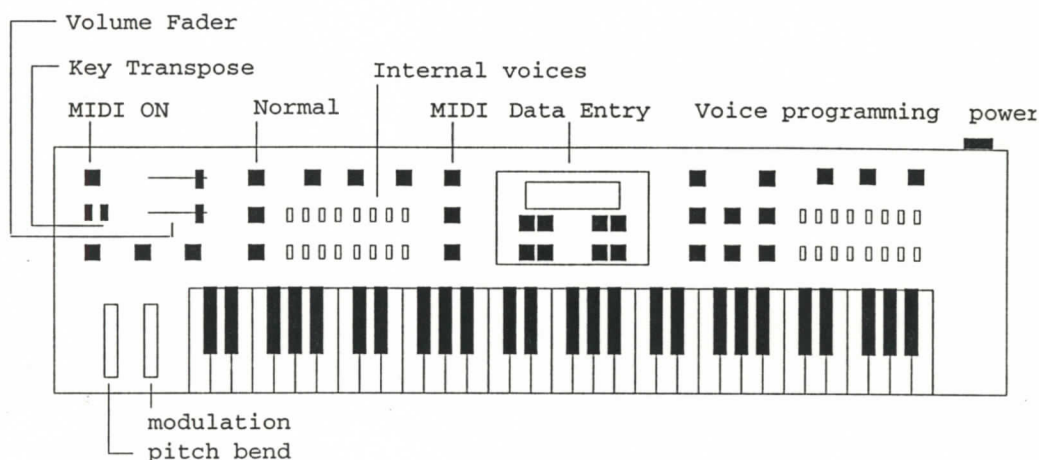

Pre-operations

- 1) Turn power on.
- 2) Pull **Volume Fader** up.
- 3) Turn **Modulation Wheel** off.
- 4) Confirm that light above **Normal** switch is on.
- 5) Confirm that **Key Transpose** shows "Key of C" in LCD.
- 6) Confirm that light above orange **MIDI ON/OFF** switch is on.

To play internal sounds from keyboard

- 1) Do pre-operations 1-6.
- 2) Select voice by pressing one alphabet button and one number button. Voice name will be displayed in LCD as:

INTERNAL A-1 voice name

To set up for MIDI reception and transmission

- 1) Do pre-operations 1-6.
- 2) Press **MIDI** switch located directly to the left of the LCD. Light above switch should come on.
- 3) LCD should look something like:

POLY KBCH=01
CH=1 PRG=ENA

- 4) Use Data Entry Keys to set:
 - Mode** (upper left of screen) to "Poly" for single channel play, or "Multi" for multiple channel play
 - KBCH** to "01" (sets keyboard transmit channel to 01)
 - CH** to "01" (sets MIDI receive channel to 01)
 - PRG** to "ENA" ("Enable" allows device to receive program changes)
- 5) Press Data Entry Key **Page Up**.
- 6) LCD should read "System Exclusive Tone Data = DIS"
- 7) Press Data Entry Key **VALUE UP** so that LCD now reads "System Exclusive Tone Data = ENA."